



VINCI-SERIES



CNC Video Measuring System
NEXIV
Standard Model

NEXIV VMZ-S Series

High Accuracy / High Speed / High Usability
Tolerance management at micro level.

High accuracy, high speed dimensional measurement with Nikon's technology.

For decades the NEXIV series has met the demands of rigorous quality control departments in numerous industrial fields around the world.


The NEXIV VMZ-S series can be used to measure various samples in the expanding market of in-vehicle electronic components and semiconductors, as well as in precision machined and molded parts.

Capable of high accuracy and high-speed measuring for ever-growing sophisticated demands, the series can also be used in a wide range of applications.




Challenges with Dimensional Measurement with Current Inspection Tools

Measurement Microscope




Profile Projector



- Need to improve work efficiency as there are many measurement samples.
- Different measurement results as there are variations in technician subjectivity and experience.

Competitive Video Measuring Systems



- Measuring accuracy not stable.
- Poor performance measuring Z heights.
- Some samples cannot be measured.
- Poor performance due to part variations or misalignment.

Using the NEXIV VMZ-S Series

Significantly improved measurement efficiency

Many samples can be measured with program measuring that utilizes image processing and high-performance electric motor stages.



4.2 hours




0.6 hour

86% less measurement time

*Dimension measurement time for multiple measurement points of 100 samples (100 mm x 100 mm) are compared with Nikon's measurement microscope and VMZ-S6555 (30 samples measured at once). The measurement time for VMZS6555 includes measurement program creation time.


Eliminate operator measurement variations

Able to achieve highly repeatable measurement independent of operator subjectivity and experience.

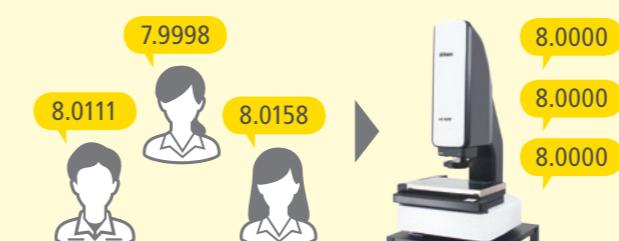

Stable measurements with high accuracy


Steady, high accuracy measurements can be obtained through a system designed and optimized from the ground up matched with a specially designed Nikon optical system for accurate measurements.



CMOS image sensors
(Optical magnification 4x, Total magnification 144x)


High accuracy, high speed height measurement

Highly accurate, high speed height measurements made possible with the high accuracy TTL laser AF capable of high-speed scanning at 1000 points per second.

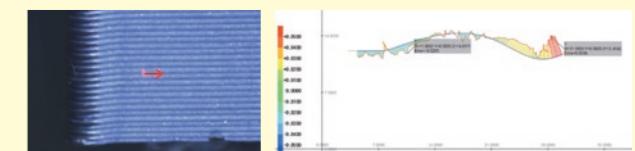

Possible to measure difficult samples

Difficult edges and features can be detected with multiple illuminations.

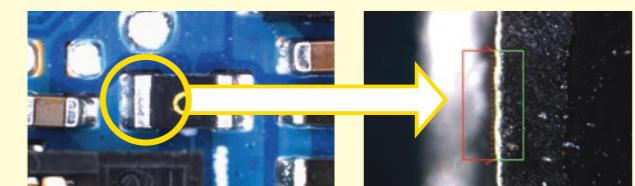

Non-stop automatic measuring

Accurate measurement can be achieved despite variation of component positioning.



High accuracy, high speed dimensional measurement


A dedicated optical system made possible only with Nikon manufactured optics.

Achieve accurate and stable measurement results quickly with Nikon's high-specification hardware design and control technologies. This has been built up over many years, meeting the demands of the manufacturing industry where high quality is paramount.

Dedicated optics making highly accurate and highly efficient dimensional measurements possible

● Capable of high resolutions at long working distance


Microsamples that require measurement at high magnification can also be taken in clear, bright images with specially designed high-NA (numerical aperture) lenses. At the same time, it is possible to measure various samples that differ significantly in height as a long working distance is guaranteed.

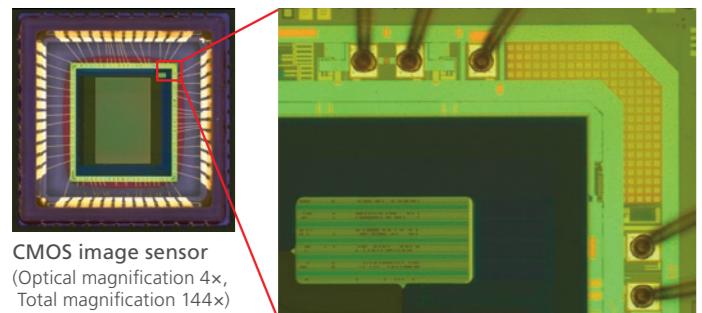

Zooming heads	Optical magnification	Working Distance
Type 1	0.5 – 7.5x	50 mm
Type 2	1 – 15x	
Type 3	2 – 30x	
Type 4	4 – 60x	30 mm
Type TZ	1 – 120x	(High-mag.) 11 mm / (Low-mag.) 32 mm
Type A	0.35 – 3.5x	73.5 mm (63 mm with Laser AF)

● Wide ranging zoom optics streamline dimensional measurements

Offers a 15:1 zoom range which is achieved without the need to swap objective lenses. (Type 1-4 heads). This allows the easy location and alignment of features prior to measurement at high magnification.

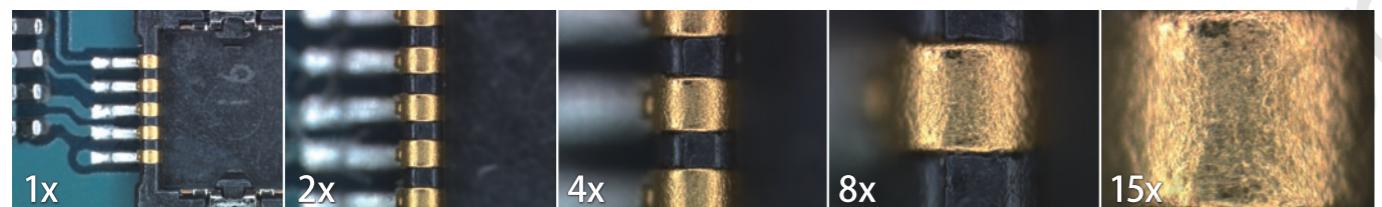

Type2 head (1x~15x)

Equipped with five zoom positions that do not require calibration when magnification is changed (Type TZ has 8). Efficient program creation and dimensional measurement are achieved as magnification can be changed at high speed, whilst maintaining highly accurate measurement.

● Excellent accuracy within field of view


Highly reliable measurement results can be obtained throughout the field of view because of the special lenses optimized for dimensional measurement with low distortion.

Probing error* P_{F2D} 0.8 μm

* Type2 zooming head. Determined by Nikon in-house measurement method. Measurement of the perimeter of circular reference device. It involves stage movement which caliper within the FOV is evenly placed at 25 points on the perimeter.

Probing error of the imaging probe* P_{FV2D} 0.3 μm

* Type2 zooming head. Determined by Nikon in-house measurement method. Measurement of 25 points that are evenly placed on the perimeter of circular reference device at one location on the screen (without stage movement).

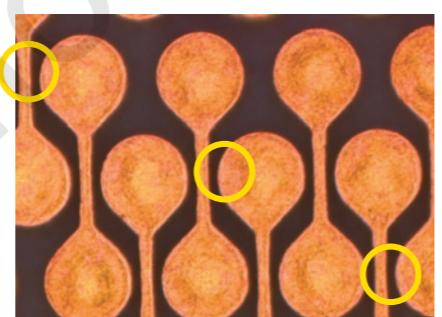


Micro wiring patterns
(Type2 head, optical magnification 15x)

High reliability within the FOV.


● High accuracy, high speed measurement with through the lens (TTL) laser AF

Through the lens (TTL) spot, scanning laser is standard on the VMZ S models. Achieves high measurement reproducibility in the Z direction ($2\sigma \leq 0.5 \mu\text{m}$).

Accurately detects small changes in height variations. Operates independent of magnification or illumination same performance throughout zoom range. Can also obtain sample cross-sections with the high-speed laser scan at 1,000 points per second.

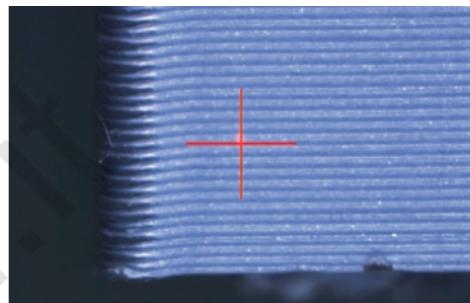

Laser spots can be checked by darkfield illumination

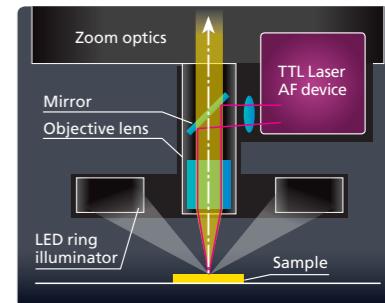


TTL Laser and AF schematic

● Image AF for any number of uses


Image AF, which detects height from an image of the shape and texture of the sample's surface, not only matches points on the sample's surface and contour edges but also measures height and depth. High-speed and high accuracy even in samples with height variations or chamfers.



• Surface mode
Focus on surface of objects

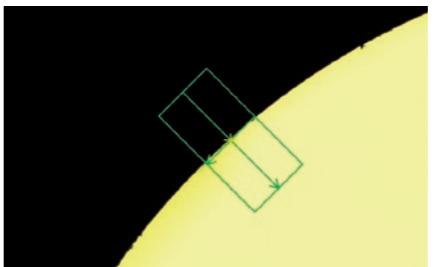

• Contrast mode
Focus on edges contoured by the bottom light

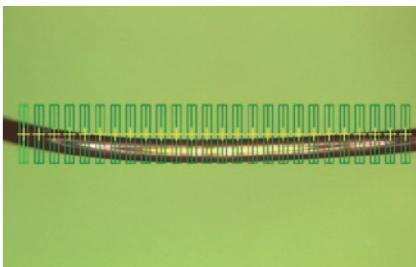

• Multi mode
Measure height of multiple points in the FOV

Robust system design optimized for high accuracy and high-speed dimensional measurement

● Hardware structure that achieves stable measurements with high accuracy

A material close to that of the coefficient of thermal expansion is used in the guide rail of the main unit and measurement stage. This ensures there is little change in shape to the guide rail even with environmental temperature changes, minimizing any impact on changes to accuracy.




● Nikon's proprietary linear encoder boasting the highest level of resolutions in video measuring system

Nikon's proprietary linear encoders with 0.01 μm resolution, are built as standard into all axes to accurately detect linear position, providing stable measurement results with high accuracy.

● Improved system throughput

Nikon has achieved high-speed measurements, faster than conventional systems, through its pursuit of control technologies and stages capable of operating with high accuracy. Cycle time has been greatly reduced with the continuous automatic measurement of microsamples, such as semiconductor and electronic components, accompanying numerous short-range movements.

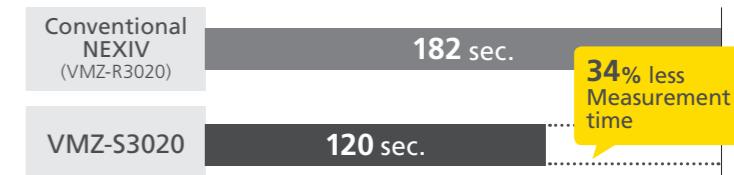


*Measurement of 625 (25x25) circle diameter. $\phi 50 \mu\text{m}$, Pitch: X,Y=0.2 mm, Stage speed: max, FOV: 0.58x0.44 mm. Same teaching file is used for measurement.

Stable automatic measurements for various samples.

The VMZ-S series incorporates a large number of functions that are essential for carrying out continuous automatic measurements.

Lighting systems capable of reliably detecting all shapes


Standard heads are equipped with episcopic, diascopic, and 8-segment LED ring illumination. Edges can be properly detected with any combination of lighting and light quantity even in samples with hard to detect height variations or chamfers, allowing for reliable automatic measurements.

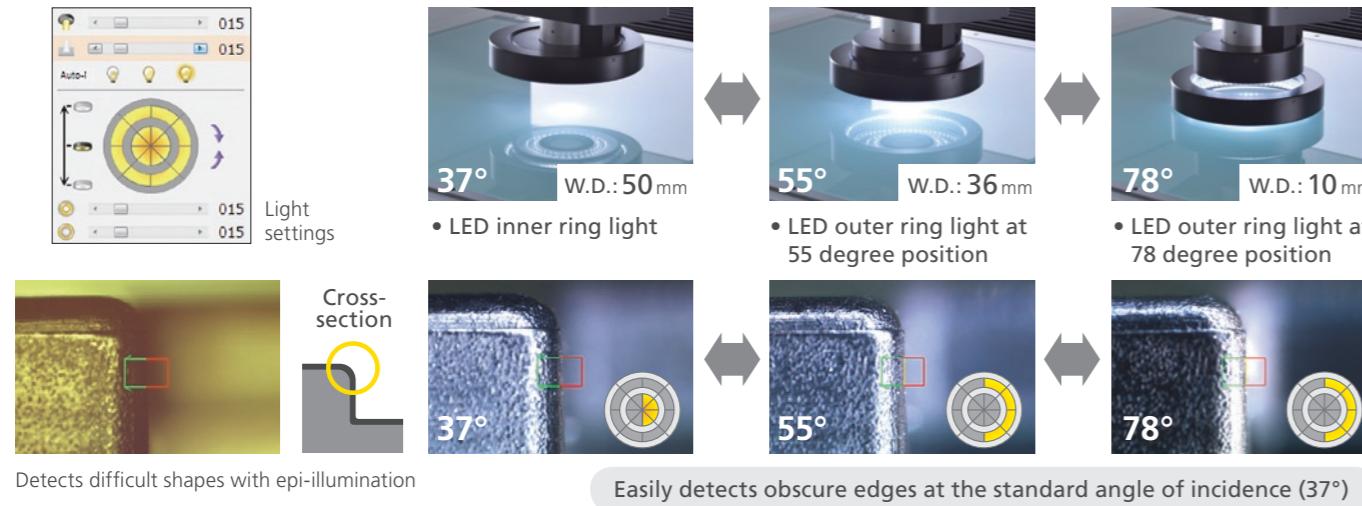

Robust edge selection function to detect random edges


One edge from a choice of many can be selected and detected.

More accurate and reliable automatic measurements can be obtained by rejecting mistaken edges brought about by foreign matter on the sample's surface.

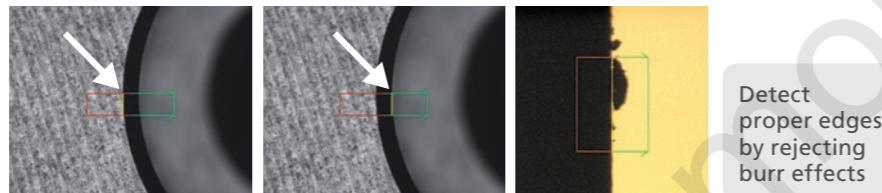

Search function to compensate for misalignment and sample variations

By automatically detecting and correcting misalignments created from how samples are placed and variations in manufacture, smooth continuous automatic measurement are made possible, even when measuring multiple samples at once.


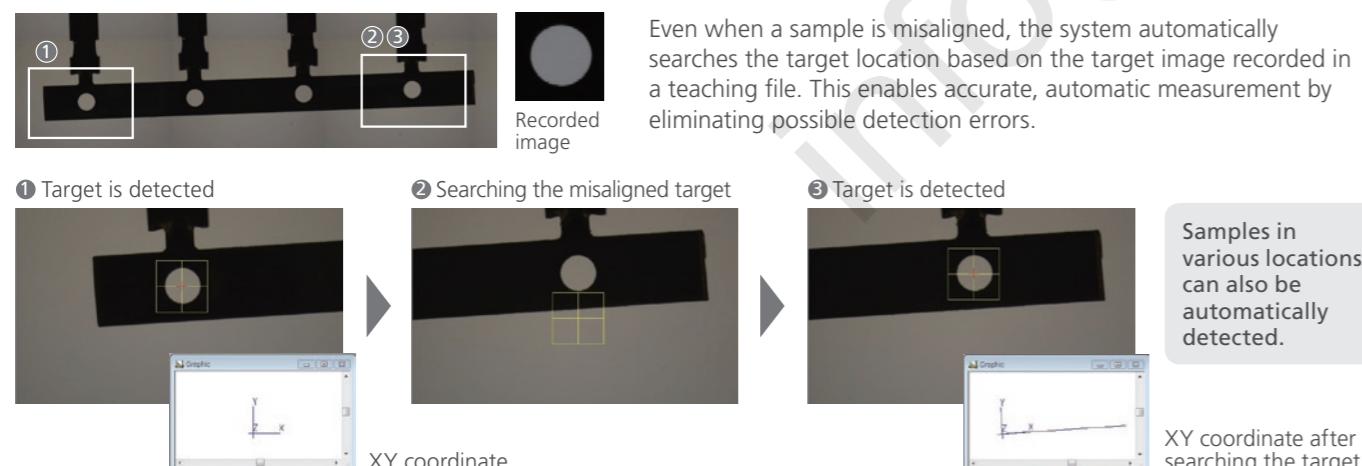


Six types of optical heads with 15x zoom capability for many different measurement needs

5 zoom positions (Type TZ has 8) in one head. Meeting the measurement requirements for accuracy and size in a wide range of samples.



Standard magnification zooming heads (type 1-3)

Connector, IC package, PCB, MLCC, Lead frame, Camera Module, Glass and Plastic Lenses, etc.

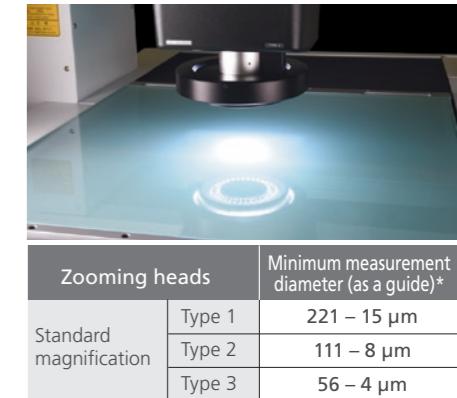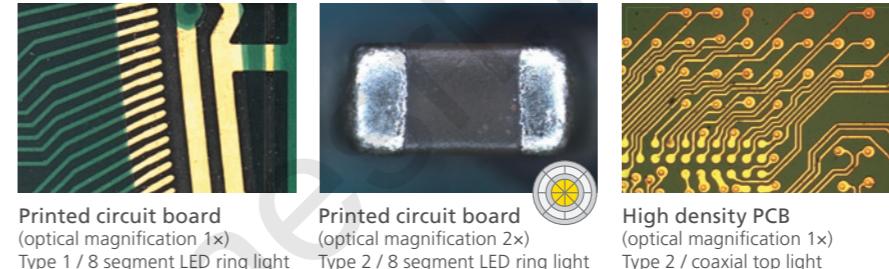

High magnification zooming heads (type 4 / type TZ)

High density printed circuit board, fine semiconductor package, Micro Electro Mechanical (MEMS) parts, etc.

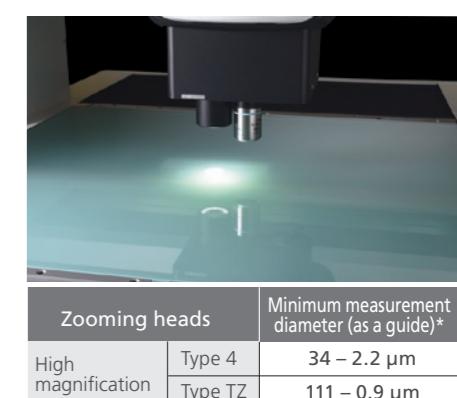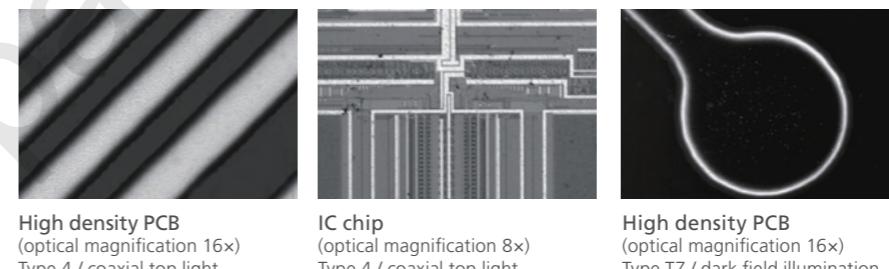

Wide FOV zooming head (type A)

Molded parts, Sheet metal stampings, rubber seals and parts, mechanical components, etc.



*Minimum measurement diameter (as a guide): This is not a guaranteed value. Sample: Calibration plate. diascopic light and measurement within FOV (without stage move). Diameter is calculated by creating least-squares circle from 36 measurement points. Please use this as a guide when choosing head types.

Optical magnification	0.35	0.5	0.6	1	1.8	2	3.5	4	7.5	8	15	16	30	32	60	64	120
Type 1		●		●		●		●		●		●		●		●	
Type 2			●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Type 3				●	●	●	●	●	●	●	●	●	●	●	●	●	●
Type 4					●	●	●	●	●	●	●	●	●	●	●	●	●
Type TZ						●	●	●	●	●	●	●	●	●	●	●	●
Type A	●	●	●	●	●	●	●	●									
FOV size on stage Horizontal (mm) x Vertical (mm)	13.3 10.0	9.33 7.01	7.8 5.8	4.7 3.5	2.6 1.9	2.33 1.75	1.33 1.00	1.165 0.875	0.622 0.467	0.582 0.437	0.311 0.233	0.291 0.218	0.155 0.117	0.146 0.109	0.078 0.058	0.073 0.055	0.039 0.029
Total magnification*	12.6	18	21.6	36	64.8	72	126	144	270	288	540	576	1080	1152	2160	2304	4320

* Total magnification is that of video window with 640 x 480 pixels on 24 inch WUXGA monitor (1920 x 1200 pixels).

3 models with different XY measuring envelopes

Choose the best model to suit sample size, sample quantity, and installation environment.

Standard stroke (300×200×200 mm)

VMZ-S3020

From machine parts and mold parts to high density printed circuit boards, VMZ-S3020 meets a wide variety of measurement needs.

Applications

- Type 1-3: Connectors, semiconductor packages, small PCB's, small stamped sheet metal parts, lead frames, watch components, etc.
- Type 4/TZ: High density PCB's, lead frames, semiconductor packages, MEMS, probe cards, etc.
- Type A: Plastic molded parts, sheet metal parts, rubber parts, mechanical parts, implant components, watch components, etc.



Middle stroke (450×400×200 mm)

VMZ-S4540

Perfect for various mold parts, medium-sized flat panels, and printed circuit boards.

Measuring also possible using various jigs and mechanical components with height.

Applications

- Type 1-3: Middle size PCB's, stamped sheet metal parts, etc.
- Type 4/TZ: 300 mm wafers, 300 mm probe cards, etc.
- Type A: Middle size mechanical parts, plastic molded parts, etc.



Large stroke (650×550×200 mm)

VMZ-S6555

VMZ-S6555 is perfectly adapted to large samples. At its best with accurate measurement of printed circuit boards and automatic measurement of a large number of small parts.

Applications


- Type 1-3: Large PCB's, large plastic molded parts, etc.
- Type 4/TZ: High density large PCB's, etc.
- Type A: Large stamped sheet metal parts, Large plastic molded parts, etc.




Easy to use, streamlined software suite

Dimension measurement software NEXIV AutoMeasure realizes high accuracy / high speed / easy measurement with valuable functions possible in a user-friendly GUI.


Graphical user interface to efficiently create programs with intuitive operation and easy-to-understand guide

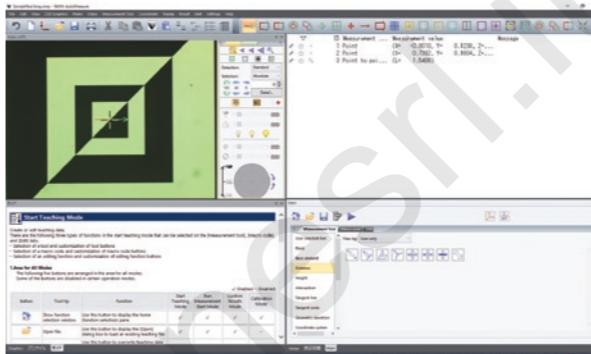


Measurement programs can be created by selecting the icon for edge detection and that which should be measured. The guide display shows the measurement function overview, details and operation procedure.




Visualization of the image profiles

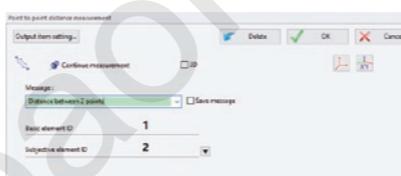

Main window of the interactive graphical user interface

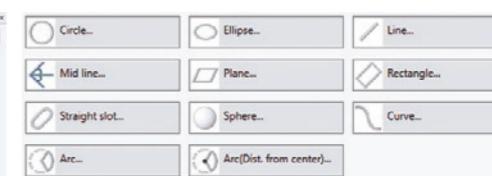

Various measurement icons

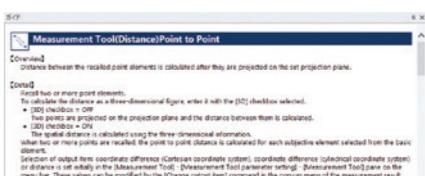

Help guide

- Support for making automatic measurement programs: various step-by-step wizards available. Easily replay by following the on-screen instructions.
- Measurement code tagging: select any measurement code and color-categorize each tag for easy management.
- Help guide: automatically displays measurement procedures during work.

Help with making measurement programs

A function which uses computer-aided design (CAD) data for creating measurement programs before any sample is obtained, is equipped as standard.

CAD interface conversion

CAD data (in IGES or DXF format) is captured and converted to display a shape or a profile of the sample in the graphics window.

Offline teaching


Measurement programs can be created offline using drawing (or processing) data. By working on a computer separate from the NEXIV main unit ensures it can be used to full capacity.

Example: Creating a measurement program offline using CAD


1 Prepare CAD data (in IGES or DXF format)



2 Import CAD data with AutoMeasure

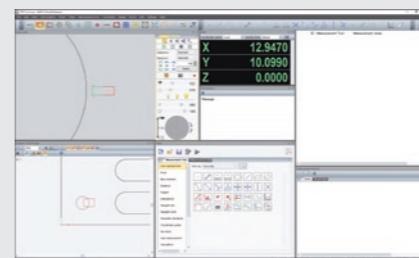

3 Create measurement program with imported CAD data

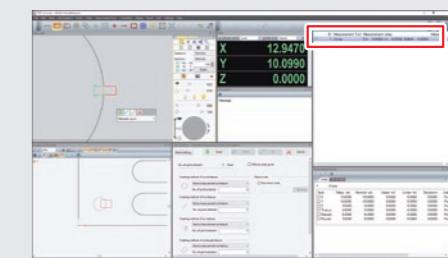


Working on a separate computer ensures the NEXIV main unit is not occupied, freeing it up so it can be used to full capacity.


For the management of various evaluations and measurement results

Evaluation of shapes

Errors can be visualized by overlaying nominal and measured shapes. Can be used for both geometrical shapes and free-form shapes.

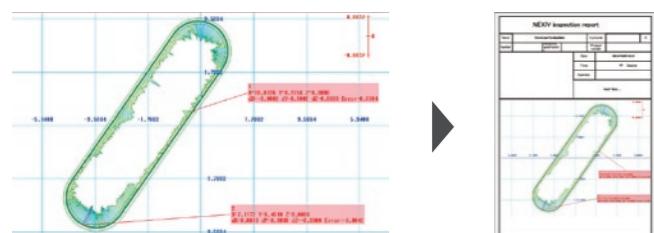


- Calculation of errors can be made in normal or axis direction
- Nominal shapes can be made from CAD data or XYZ coordinate values
- Measured shapes can be output as CSV or DXF files
- Evaluation reports can be made in PDF files

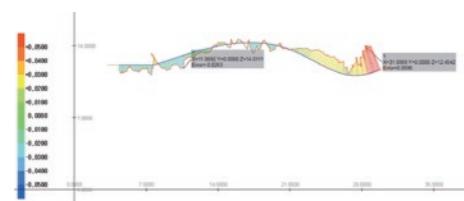

Able to obtain sample cross-sectional shapes with the high-speed laser scan at 1000 points per second.
Compatible with shape evaluation in height direction.

Result evaluations in line with JIS/ISO standards

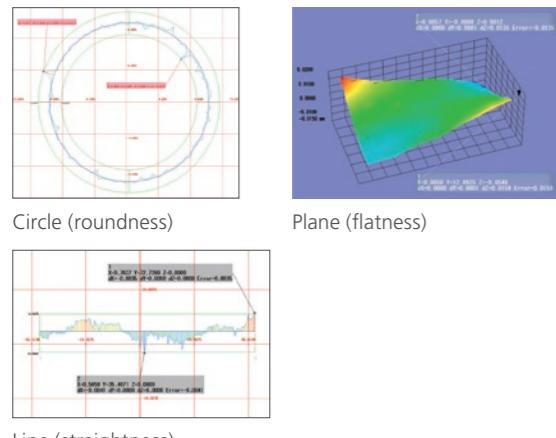


Geometrical tolerance measurements

Equipped with the ability to measure various geometrical tolerances.

	Perpendicularity		Parallelism
	True position		Roughness (ISO 1997)
	Angularity		Concentricity
	Symmetry		Circular runout

Digital operation guide NEXIV Note

The function offers slides and movie output together with NEXIV contents, such as basic operations and functions. Simple measurement programs can be created by referring to this application.

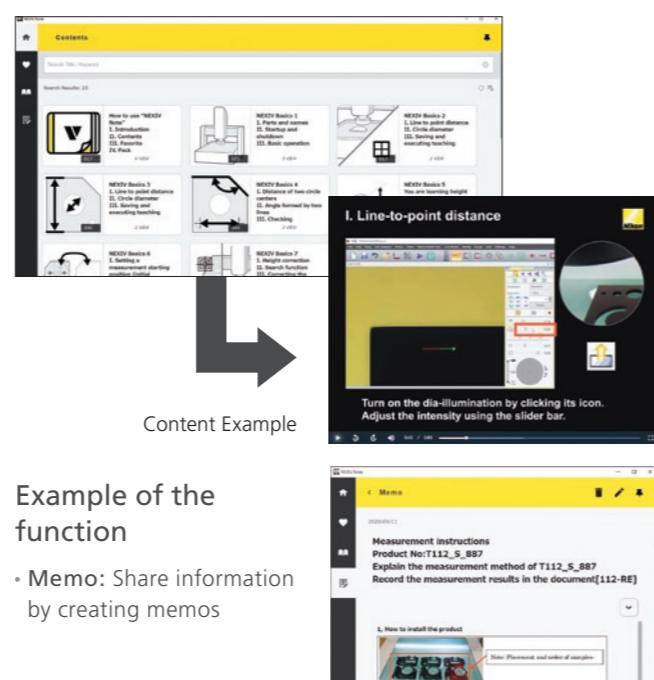

Example of the function


- Memo: Share information by creating memos

DXF file creation

DXF files can be created from measurement results.

MapMeasure Pro Option

With the ability to automatically measure any chip from creating a chip map, Map Measure Pro can easily specify any chip with just a click of the mouse on the GUI. Huge improvements in measuring efficiencies of standardly arranged samples, such as wafers.

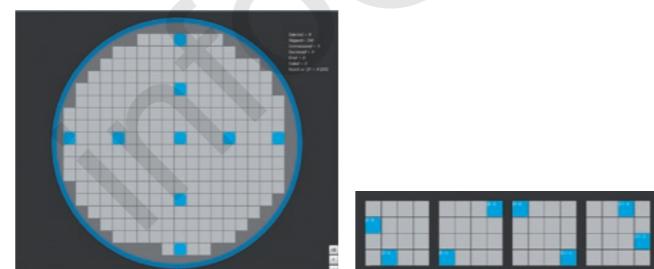


Application for lead frame measurement Option

Measurement programs can be created easily with the automatic lead position search.

From importing CAD data to the evaluation, management and utilization of measurement results, Nikon has a whole range of optional software solutions to improve productivity in dimensional measurements in any situation.

EDF/Stitching Express


Images taken with the VMZ-S can be stitched to get a larger mosaic image, while images at different heights can result with an image with Extended Depth of Focus (EDF). Stitching and EDF can produce full 3D graphics.

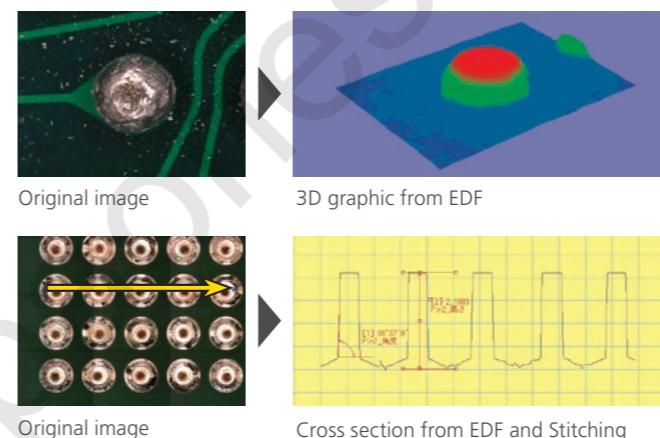

MountainsMap X

Sample surfaces can be analyzed, based on ISO, with the data exported from VMZ-S.

Provided for Nikon by Digital Surf (France)

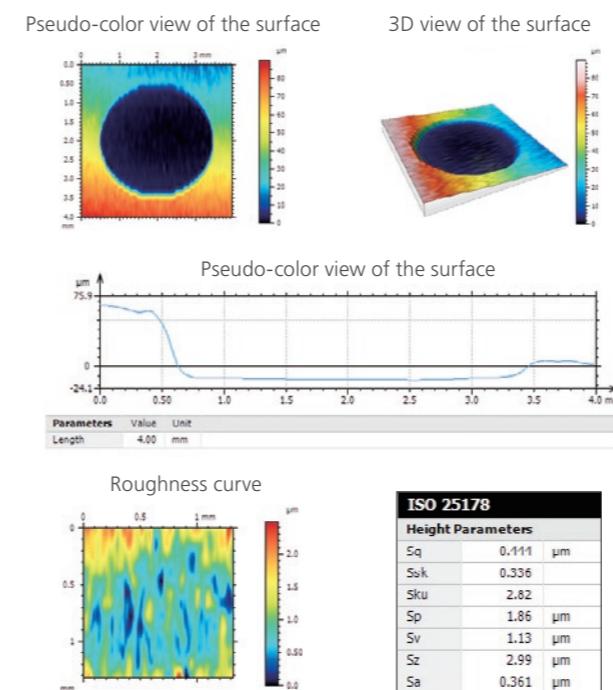

Inspection Results Preparing System

ImageFit QC

Inspection results used can be imported and automatically reflected into the measurement results. Pass/fail results and statistical data*1 are generated automatically. The function to create graphs*2 also helps visualize measurement results.

*1: Standard deviation, process capability index (Cp, Cpk)

*2: Line graphs, histograms




Custom Fit QC

Measurement results are read into 10 different templates and pass/fail results and calculation results*1 are automatically exported. Graphs*2, including \bar{X} -R control charts and scatter diagrams, can be automatically generated to visualize measurement results.

*1: Average, maximum value, minimum value, range, standard deviation, and process capability index (Cp, Cpk)

*2: Line graphs, histograms, \bar{X} -R control charts, scatter diagrams

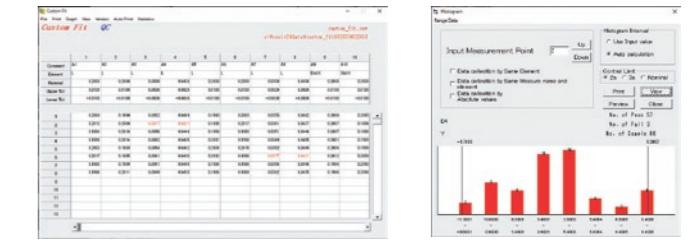


*Excel is required

Codeveloped by Aria Co. Ltd. (Japan)

3D CAD Converter

3DCAD model can be converted to 2DCAD (NCD) file, which can be used in NEXIV AutoMeasure.

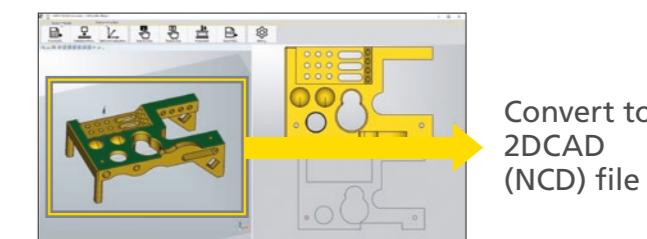


Convert to
2DCAD
(NCD) file

Automating the production floor

Helping to further automate and advance the production floor through multiple NEXIV controls and integration of component carrier conveyor systems.



Remote control SDK for automatic measurement system integration

The remote control Software Development Kit (SDK) is a tool for developing user software modules to control and automate the NEXIV video measuring systems. Automate component carriers and measurement steps remotely or on the production floor by integrating NEXIV together with the component carrier conveyor system.


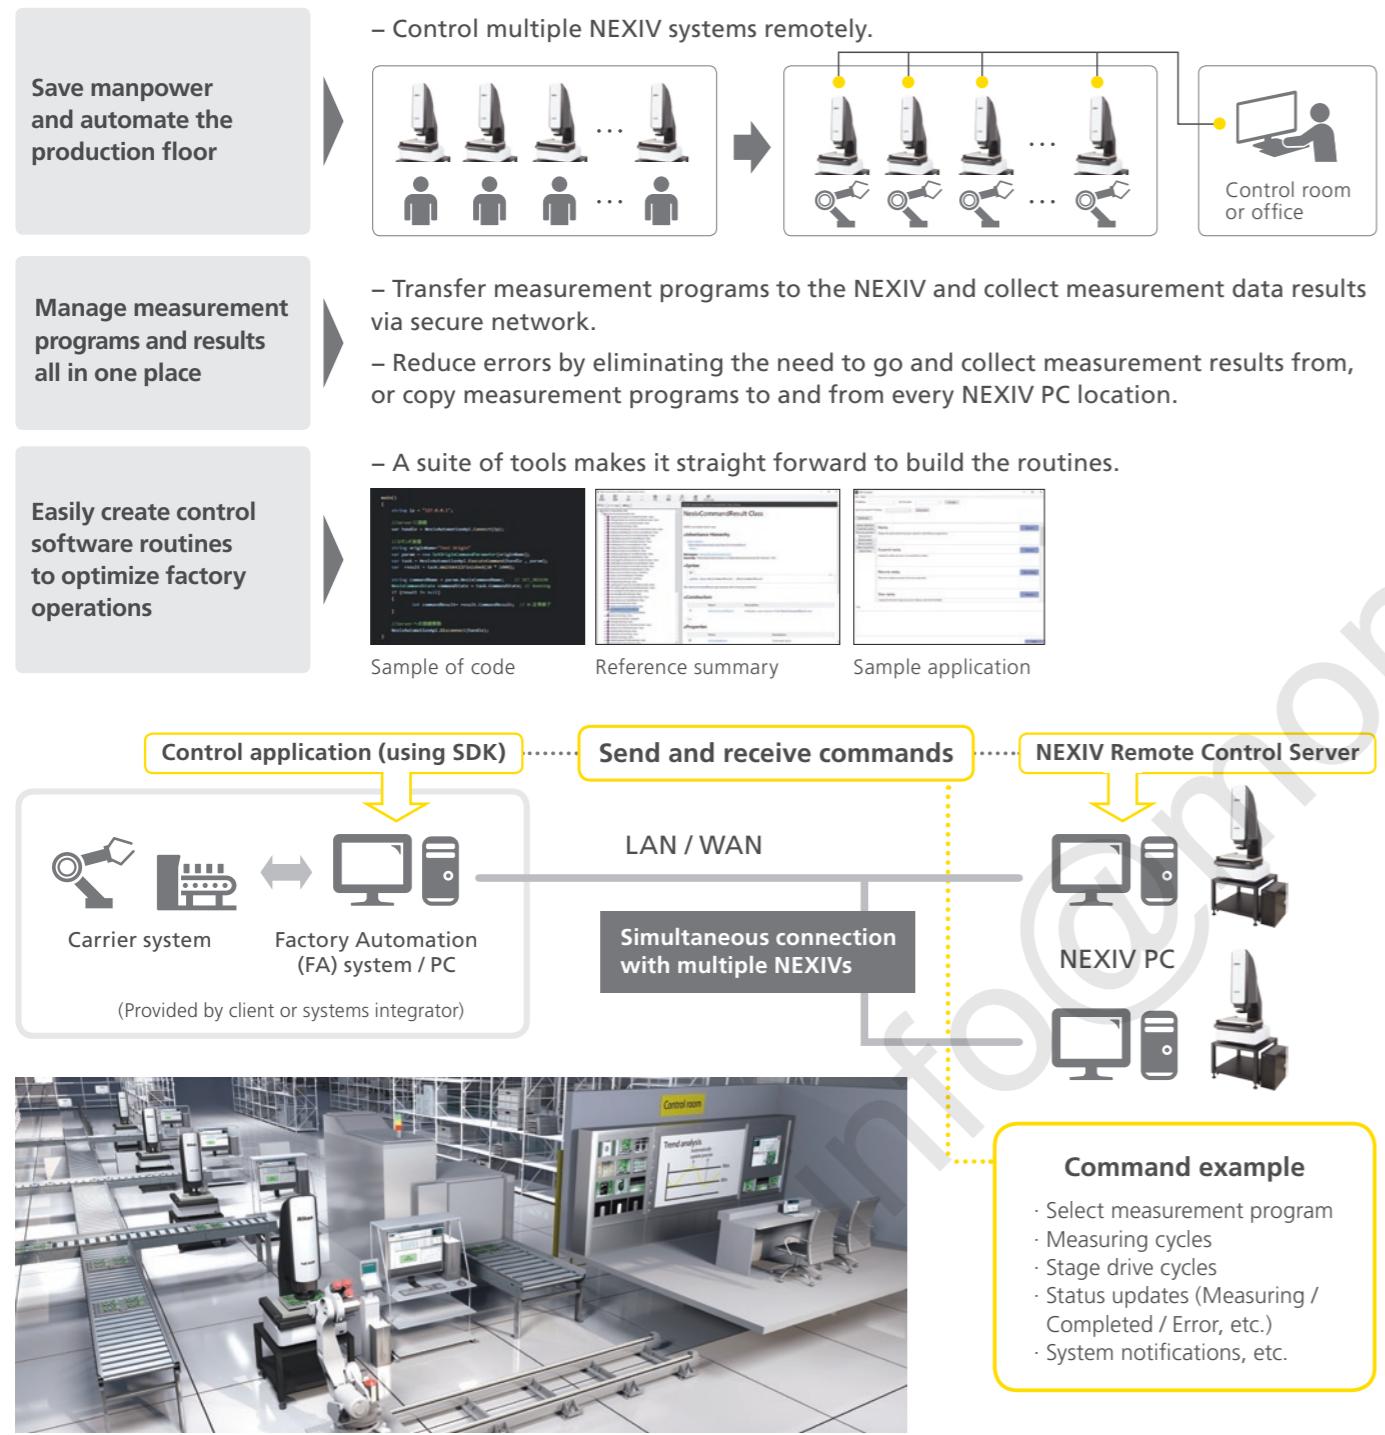


Dimension



VMZ-S3020

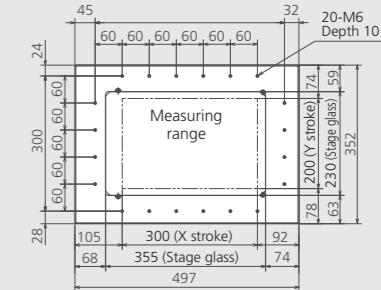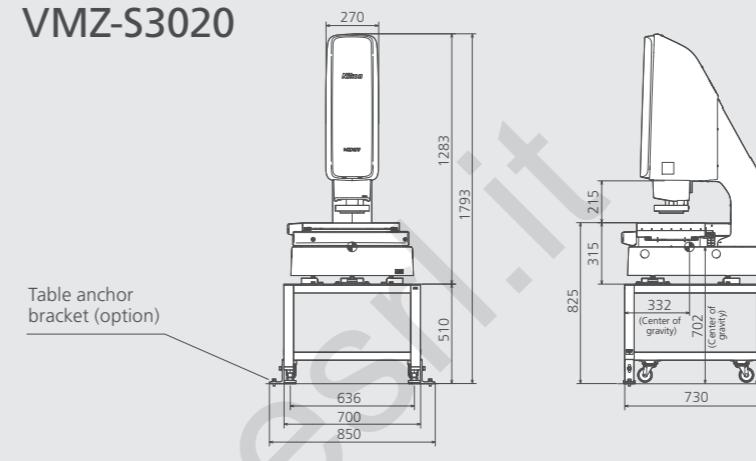

VMZ-S4540

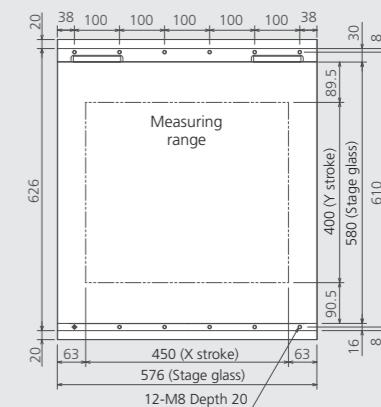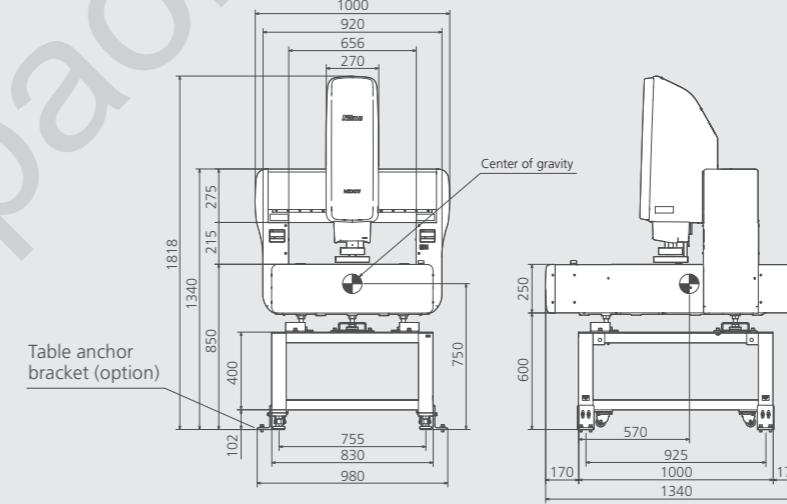

VMZ-S6555

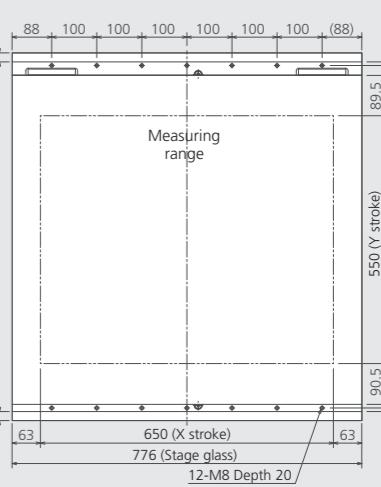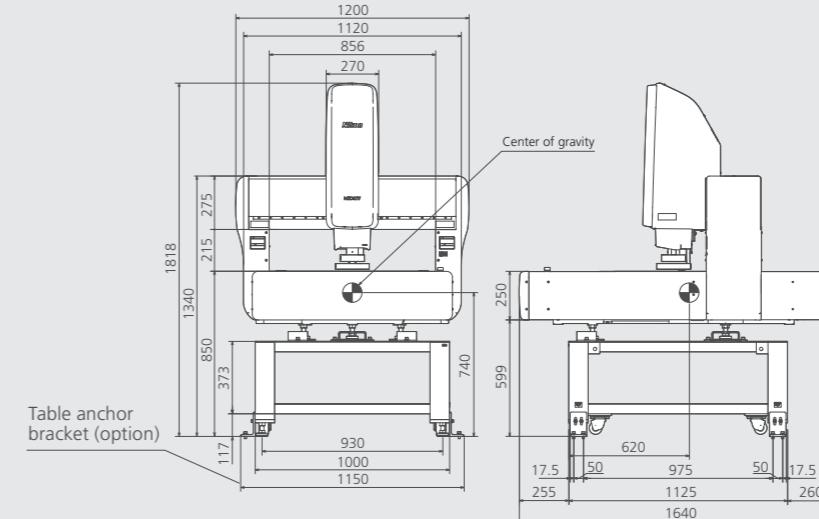

Various system variations in the NEXIV series

For more accurate measurements, for measurements with wider field of view, and for quick height measurements. All the various system variations in the NEXIV series meet the different measurement needs.

High accuracy model

VMZ-H3030



Model	VMZ-H3030
XYZ strokes	300x300x150 mm
Maximum sample weight	30 kg (Accuracy guaranteed: 10 kg)
Maximum permissible error (L: Length in mm)	EUX, MPE EUY, MPE: $0.6 + 2L / 1000 \mu\text{m}$ EUXY, MPE: $0.9 + 3L / 1000 \mu\text{m}$ Euz, MPE: $0.9 + L / 150 \mu\text{m}$

NEXIV series high accuracy model

Easy-to-use, fast and the most accurate measurements in the NEXIV series with the accurate stage operation and high-performance optics.

Applications

Micro boards (line width, height), next-generation semiconductor packages (WLP, bump height), precision molds, rewiring masks, MEMS masks, etc.



Model	VMZ-H3030
XYZ strokes	300x300x150 mm
Maximum sample weight	30 kg (Accuracy guaranteed: 10 kg)
Maximum permissible error (L: Length in mm)	EUX, MPE EUY, MPE: $0.6 + 2L / 1000 \mu\text{m}$ EUXY, MPE: $0.9 + 3L / 1000 \mu\text{m}$ Euz, MPE: $0.9 + L / 150 \mu\text{m}$

Wide FOV model

VMA



Model	iNEXIV VMA-2520	iNEXIV VMA-4540	iNEXIV VMA-6555
XYZ strokes	250x200x200 mm	450x400x200 mm	650x550x200 mm
Maximum sample weight	15 kg (Accuracy guaranteed: 5 kg)	40 kg (Accuracy guaranteed: 20 kg)	50 kg (Accuracy guaranteed: 30 kg)
Maximum permissible error (L: Length in mm)	EUX, MPE EUY, MPE: $2 + 8L / 1000 \mu\text{m}$ EUXY, MPE: $3 + 8L / 1000 \mu\text{m}$ Euz, MPE: $3 + L / 50 \mu\text{m}$	EUX, MPE EUY, MPE: $2 + 6L / 1000 \mu\text{m}$ EUXY, MPE: $3 + 6L / 1000 \mu\text{m}$ Euz, MPE: $3 + L / 100 \mu\text{m}$	

Up to 13.3 x 10 mm field of view (on stage 0.35x at observation)

Easy to check measurement position and alignment of samples and stage

Long working distance of 73.5 mm

At its best with depth measurements in large height variations, high bosses, and fine, deep holes, etc.



Compatible with touch probe measurements (optional)

Able to measure the dimensions and angles of unseen parts, such as the bore of side holes.



Applications

Electronic parts, resin molding parts, various mold parts, press parts, die cast parts, etc.

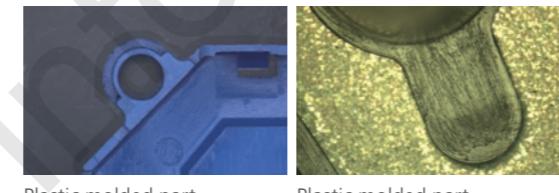

Model	iNEXIV VMA-2520	iNEXIV VMA-4540	iNEXIV VMA-6555
XYZ strokes	250x200x200 mm	450x400x200 mm	650x550x200 mm
Maximum sample weight	15 kg (Accuracy guaranteed: 5 kg)	40 kg (Accuracy guaranteed: 20 kg)	50 kg (Accuracy guaranteed: 30 kg)
Maximum permissible error (L: Length in mm)	EUX, MPE EUY, MPE: $2 + 8L / 1000 \mu\text{m}$ EUXY, MPE: $3 + 8L / 1000 \mu\text{m}$ Euz, MPE: $3 + L / 50 \mu\text{m}$	EUX, MPE EUY, MPE: $2 + 6L / 1000 \mu\text{m}$ EUXY, MPE: $3 + 6L / 1000 \mu\text{m}$ Euz, MPE: $3 + L / 100 \mu\text{m}$	

Confocal model

VMZ-K




VMZ-K3040

Fine 3D high-speed / high-resolution inspection is possible


As well as 2D measurements with bright field images, the confocal optics allow height measurements in one field of view.

High Contrast Sample (copper wire on print board)

Accurate measurement of high contrast samples tends to be difficult with brightfield illumination because their edges appear unclear. Confocal optics enables a clear display, and facilitates accurate detection of sample edges.

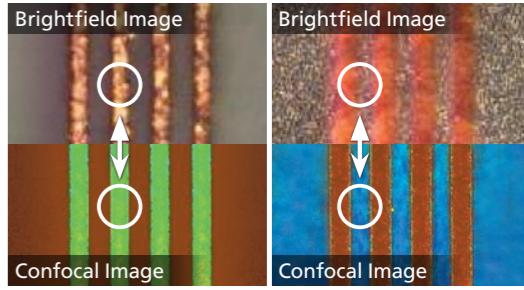

Focus on Upper Area (with high contrast)




Focus on Lower Area (with low contrast)

Applications


Micro wiring patterns (top and bottom), bonding wires, probe cards, WLP, PLP, etc.

Fine Bump and Substrate Pattern

A combination of 2D measurement with 15x zoom brightfield image and 3D height measurement in the same field of view enables diverse measurements.




Brightfield Image (minimum magnification)



Brightfield Image (maximum magnification)




3D Image

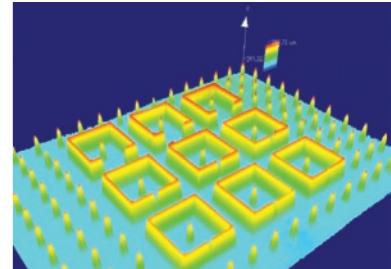


Bird's-eye View Image by 3D Viewer Software (option)


Bonding Wire Loop Height



Brightfield Image



3D Image: simultaneous detection of the highest point of all wires



Display of wire height profile

Model	VMZ-K3040	VMZ-K6555
XYZ strokes	300x400x150 mm	650x550x150 mm
Zoom magnification (type S)	1.5x / 3x / 7.5x	
Zoom magnification (type H)	15x / 30x	
Maximum sample weight	20 kg	30 kg
Maximum permissible error (L: Length in mm)	EUX, MPE EUY, MPE: $1.5 + 2.5L / 1000 \mu\text{m}$ EUXY, MPE: $2.5 + 2.5L / 1000 \mu\text{m}$ Euz, MPE: $1 + L / 1000 \mu\text{m}$	EUX, MPE EUY, MPE: $1.5 + 2.5L / 1000 \mu\text{m}$ EUXY, MPE: $2.5 + 2.5L / 1000 \mu\text{m}$ Euz, MPE: $1 + L / 1000 \mu\text{m}$

Specifications

Model	VMZ-S3020	VMZ-S4540	VMZ-S6555
XYZ strokes	300×200×200 mm	450×400×200 mm	650×550×200 mm
Type TZ with low magnification lens	250×200×200 mm	400×400×200 mm	600×550×200 mm
Minimum readout	0.01 μ m		
Maximum sample weight	20 kg (Accuracy guaranteed: 5 kg)	40 kg (Accuracy guaranteed: 20 kg)	50 kg (Accuracy guaranteed: 30 kg)
Maximum permissible error (L : Length in mm)	EUX, MPE EUY, MPE: $1.2 + 4L / 1000 \mu$ m / EUY, MPE: $2.0 + 4L / 1000 \mu$ m / EUZ, MPE: $1.2 + 5L / 1000 \mu$ m Probing error ^{1,2)} : MPE P_{F2D} 0.8 μ m / Probing error of the imaging probe ^{1,2)} : MPE P_{FV2D} 0.3 μ m		
Camera	Black and White / Color 1/3 CMOS Camera		
Working distance	Type 1, 2 and 3: 50 mm Type TZ: 11 mm	Type 4: 30 mm Type A: 73.5 mm (63 mm with Laser AF)	
Autofocus	Laser AF (Option for Type A) / Image AF		
Laser AF repeatability range ^{1,3)}	$2\sigma \leq 0.5 \mu$ m		
Illumination	Type 1, 2, 3, and 4: Episcopic, diascopic, and 8-segment ring with 3 angles *All white LED/Type 4 has only 1 angle Type TZ: Left objective lens: Episcopic, darkfield ; Right objective lens: Episcopic, diascopic, darkfield Type A: Episcopic, diascopic, and 8-segment ring with 1 angle *All white LED		
Power source, Power consumption	AC100 V-240 V, 50/60 Hz / 4 A – 2 A		
Dimensions (W×D×H) & weight	700×730×1793 mm / approx. 265 kg	1000×1340×1818 mm / approx. 510 kg	1200×1640×1818 mm / approx. 740 kg Controller: 190×450×450 mm / approx. 12 kg
Footprint (W×D)	2700×2400 mm	3000×3000 mm	3200×3300 mm

1) Determined by Nikon in-house measurement method.

2) With Type 2 head, 15x.

3) Workpiece: Chrome on calibration plate, without Type A head.

4) Includes maintenance space.

Overview of the
VMZ-S Series (video) ►



Nikon Corporation Industrial Metrology Business Unit is certified as an ISO/IEC 17025 accredited calibration laboratory for CNC video measuring systems by the IAJapan (International Accreditation Japan) as Accreditation No.JCSS0241.

ISO/IEC 17025: International standard, which specifies the general requirements to ensure that a laboratory is competent to carry out specific tests and/or calibrations

Date of initial accreditation:	November 22, 2010
Scope of accreditation:	Coordinate measuring instruments
Accredited section:	Industrial Metrology Business Unit
Calibration site:	Customer's laboratory (field service)
Calibration and Measurement Capability (CMC), (K=2, Level of Confidence Approximately 95%) [L =measurement length (mm)]	$L \leq 420 \text{ mm: } 0.32 \mu\text{m}$ $420 \leq L \leq 1000 \text{ mm: } (0.29 + 0.64 \times L/1000) \mu\text{m}$

Specifications and equipment are subject to change without any notice or obligation on the part of the manufacturer. May 2021 ©2021 NIKON CORPORATION

N.B. Export of the products* in this catalog is controlled under the Japanese Foreign Exchange and Foreign Trade Law. Appropriate export procedures shall be required in case of export from Japan.

*Products: Hardware and its technical information (including software)

Company names and product names appearing in this brochure are their registered trademarks or trademarks.



TO ENSURE CORRECT USAGE, READ THE CORRESPONDING MANUALS CAREFULLY BEFORE USING THE EQUIPMENT.



NIKON CORPORATION

Shinagawa Intercity Tower C, 2-15-3, Konan, Minato-ku, Tokyo 108-6290, Japan
phone: +81-3-6433-3701 fax: +81-3-6433-3784
<https://www.nikon.com/products/industrial-metrology/>

ISO 14001 Certified
for NIKON CORPORATION

ISO 9001 Certified
for NIKON CORPORATION
Industrial Metrology Business Unit

NIKON METROLOGY EUROPE NV
Interleuvenlaan 86 B-3001 Leuven, Belgium
phone: +32-16-74-01-00 fax: +32-16-74-01-03

E-mail: Sales.Europe.NM@nikon.com
<http://www.nikonmetrology.com/en-gb>

NIKON METROLOGY UK LTD.
UNITED KINGDOM phone: +44-1332-811-349 fax: +44-1332-639-881
E-mail: Sales.UK.NM@nikon.com

NIKON METROLOGY SARL
FRANCE phone: +33-1-60-86-09-76 fax: +33-1-60-86-57-35
E-mail: Sales.France.NM@nikon.com

NIKON METROLOGY GMBH
GERMANY phone: +49-211-45-44-69-51
E-mail: Sales.Germany.NM@nikon.com

NIKON INSTRUMENTS S.p.A.
ITALY phone: +39-055-300-96-01 fax: +39-055-30-09-93

NIKON METROLOGY, INC.
12701 Grand River Road, Brighton, MI 48116 U.S.A.
phone: +1-810-220-4360 fax: +1-810-220-4300

E-mail: Sales.NM-US@nikon.com
<http://www.nikonmetrology.com/en-us>

NIKON METROLOGY - MÉXICO
MEXICO phone: +52-442-688-5067
E-mail: Sales.NM-MX@nikon.com

NIKON INSTRUMENTS (SHANGHAI) CO., LTD.
CHINA (Shanghai branch) phone: +86-21-6841-2050 fax: +86-21-6841-2060
(Beijing branch) phone: +86-10-5831-2028 fax: +86-10-5831-2026

(Guangzhou branch) phone: +86-20-3882-0551 fax: +86-20-3882-0580

NIKON INSTRUMENTS KOREA CO., LTD.
KOREA phone: +82-2-2186-8400 fax: +82-2-555-4415

NIKON SINGAPORE PTE. LTD.
SINGAPORE phone: +65-6559-3651 fax: +65-6559-3668
E-mail: NSG.Industrial-sales@nikon.com

PT. NIKON INDONESIA

INDONESIA phone: +62-267-864-3949 fax: +62-267-864-3950

E-mail: PTN.Instruments@nikon.com

NIKON SALES (THAILAND) CO., LTD.

THAILAND phone: +66-2633-5100 fax: 66-2633-5191